

# DATABLAD




PE-KRAGE - Kort, SDR 11 for Vann og Gass

## PRODUKT BILDE



## TEGNING MED MÅL

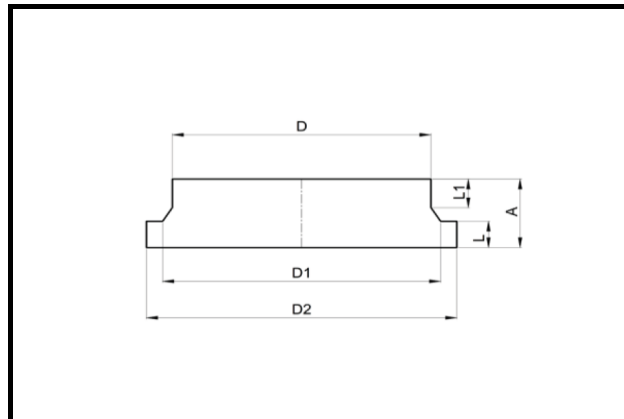

### Series

1256/14

AVK ref. nr.	NRF nr.	D mm	D1 mm	D2 mm	L mm	L1 mm	A mm	Vekt Kg
SSSFHK200N	2265015	200	232	268	32	50	120	1.86
SSSFHK225N	2265016	225	238	268	32	53	120	1.98
SSSFHK250N	2265017	250	288	320	35	45	120	2.64
SSSFHK280N	2265018	280	288	320	35	46	120	2.871
SSSFHK315N	2265019	315	338	375	35	47	120	3.73
SSSFHK355N	2265021	355	376	435	45	45	120	5.3
SSSFHK400N	2265022	400	430	485	50	40	124	6.74
SSSFHK450N	2265023	450	465	545	66	40	140	11.52
SSSFHK450NE	2265024	450 (DN500)	517	585	65	40	160	12.64
SSSFHK500N	2265025	500	530	590	60	40	134	11.28
SSSFHK560N	2265026	560	618	690	80	43	180	19.71
SSSFHK630N	2265027	630	645	690	65	45	140	16.16

Materiale:	PE100 Sort
Type:	Kort krage
Varemerke	Fusamatic
Prosess:	Sprøytstøp
Applikasjon:	Vann og Gass

Standard: EN12201-3 & INSTA SBC  
EN 1555-3 & INSTA SBC  
AS/NZS4129



FUSION PLASTICS LTD reserve the right to revise this product specification document, while maintaining compliance with the requirements of the product without prior notice. Tolerance on diameters and thickness according to the relevant standards unless otherwise specified. Tolerance: ±5%

Member of the **AVR** group

Dato opprettet:

KJMY/een 14/02/2019