


PE-KRAGE - kort SDR 17 for Vann og Gass

PRODUKT BILDE



TEGNING MED MÅL

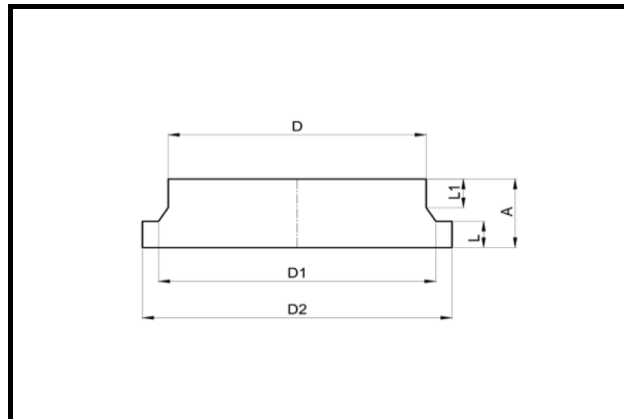

Serie

1256/16

AVK ref. nr.	NRF nr.	D mm	D1 mm	D2 mm	L mm	L1 mm	A mm	Vekt Kg
SSSFHK200V	2265042	200	230	268	24	57	120	1.39
SSSFHK225V	2265043	225	238	268	24	61	120	1.45
SSSFHK250V	2265044	250	288	320	25	55	120	1.94
SSSFHK280V	2265045	280	288	320	25	56	120	2.09
SSSFHK315V	2265046	315	338	375	25	57	120	2.72
SSSFHK355V	2265047	355	376	435	30	60	120	3.8
SSSFHK400V	2265048	400	430	485	33	52	120	4.71
SSSFHK450V	2265049	450	465	545	45	40	134	7.3
SSSFHK450VE	2265051	450 (DN500)	517	585	45	40	134	8.16
SSSFHK500V	2265052	500	530	590	46	45	120	7.54
SSSFHK560V	2265053	560	618	690	50	36	130	11.21
SSSFHK630V	2265054	630	645	690	50	45	120	10.6

Materiale:	PE100 Sort
Type:	Kort krage
Varemerke:	Fusamatic
Prosess:	Sprøyttestøp
Applikasjon:	Vann og Gass

Standard: EN12201-3 & INSTA SBC
EN 1555-3 & INSTA SBC
AS/NZS4129



FUSION PLASTICS LTD reserve the right to revise this product specification document, while maintaining compliance with the requirements of the product without prior notice. Tolerance on diameters and thickness according to the relevant standards unless otherwise specified. Tolerance: ±5%