

DATABLAD


PE-krage - SDR 17 for Vann og Gass



PRODUKT BILDE



TEGNING MED MÅL

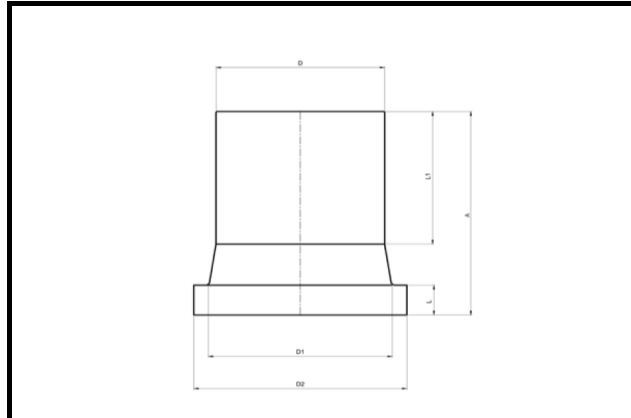

Serie

1256/28

AVK ref. nr.	NRF nr.	D mm	D1 mm	D2 mm	L mm	L1 mm	A mm	Vekt Kg
SFHK63V	2265089	63	78	102	14	88	120	0.16
SFHK75V	2265091	75	92	122	16	97	130	0.272
SFHK90V	2265092	90	108	139	17	106	140	0.35
SFHK110V	2265093	110	125	158	17	113	155	0.53
SFHK125V	2265094	125	135	158	20	120	160	0.57
SFHK140V	2265095	140	155	188	18	128	188	1.108
SFHK160V	2265096	160	175	212	18	147	185	1.07
SFHK180V	2265097	180	188	212	20	111	153	1.11
SFHK200V	2265098	200	230	268	24	125	188	1.912
SFHK225V	2265099	225	238	268	24	156	205	2.316
SFHK250V	2265101	250	288	320	25	133	186	2.841
SFHK280V	2265102	280	288	320	25	148	213	3.958
SFHK315V	2265103	315	338	375	25	166	223	4.47
SFHK355V	2265104	355	376	435	30	174	227	6.062
SFHK400V	2265105	400	430	485	33	185	242	8.328
SFHK450VP	2265106	*450	465	545	45	195	335	14.26
SFHK500VP	2265107	*500	530	590	46	212	339	16.88
SFHK560VP	2265108	*560	618	690	50	235	373	24.17
SFHK630VP	2265109	*630	645	690	50	255	384	28.42

Materiale:	PE100 Svart
Type:	Lang krage
Varemerke:	Fusamatic
Prosess:	Sprøytestøp
Applikasjon:	Vann og gass
Standard:	EN12201-3 & INSTA SBC EN 1555-3 & INSTA SBC AS/NZS4129



FUSION PLASTICS LTD reserve the right to revise this product specification document, while maintaining compliance with the requirements of the product without prior notice. Tolerance on diameters and thickness according to the relevant standards unless otherwise specified. Tolerance: ±5%

Member of the **AVR** group

Opprettet dato: KJMY/een 18/02/2019