



PRODUKT BILDE

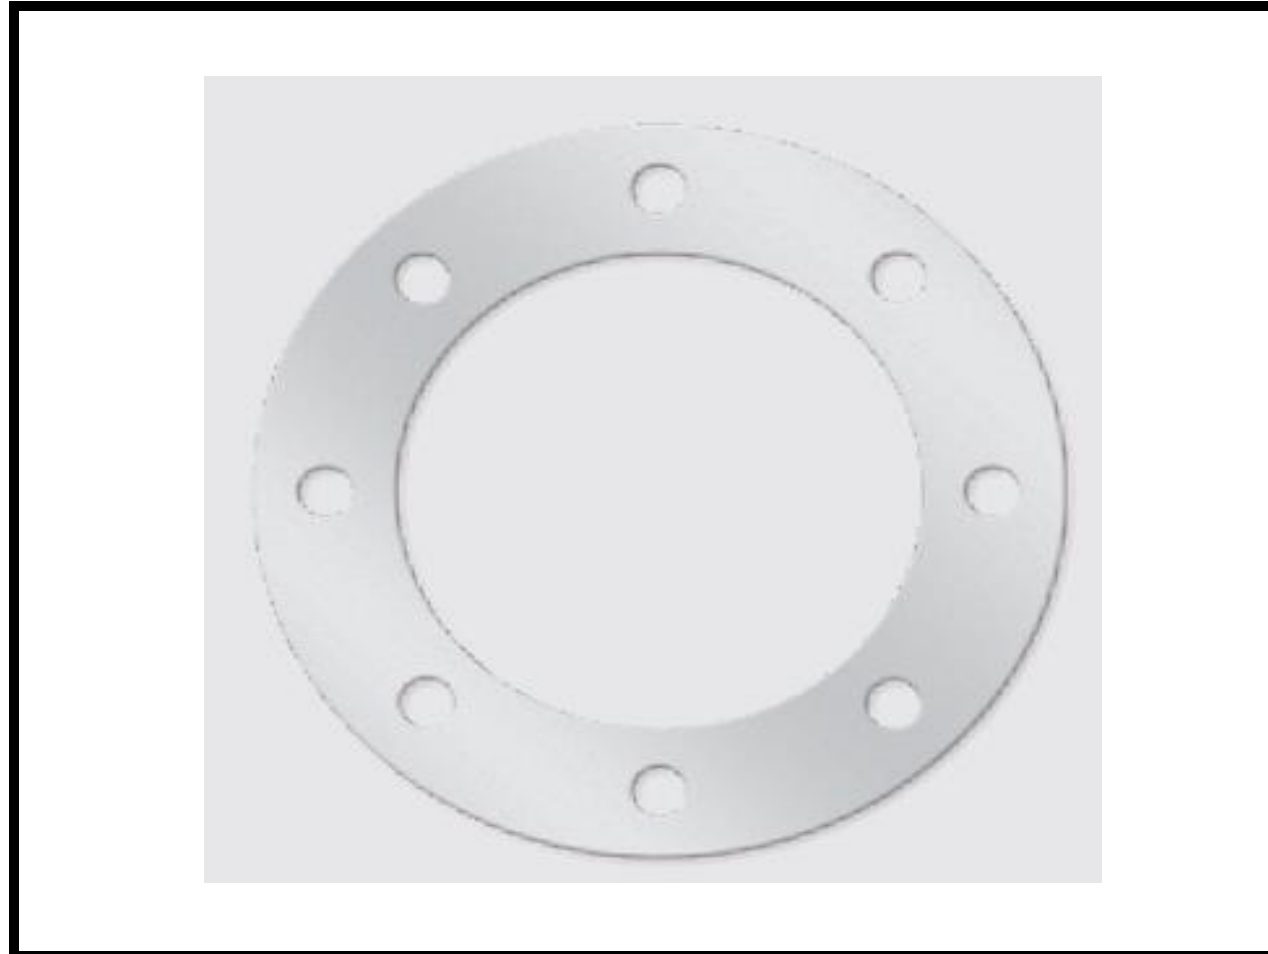

TEGNING MED MÅL

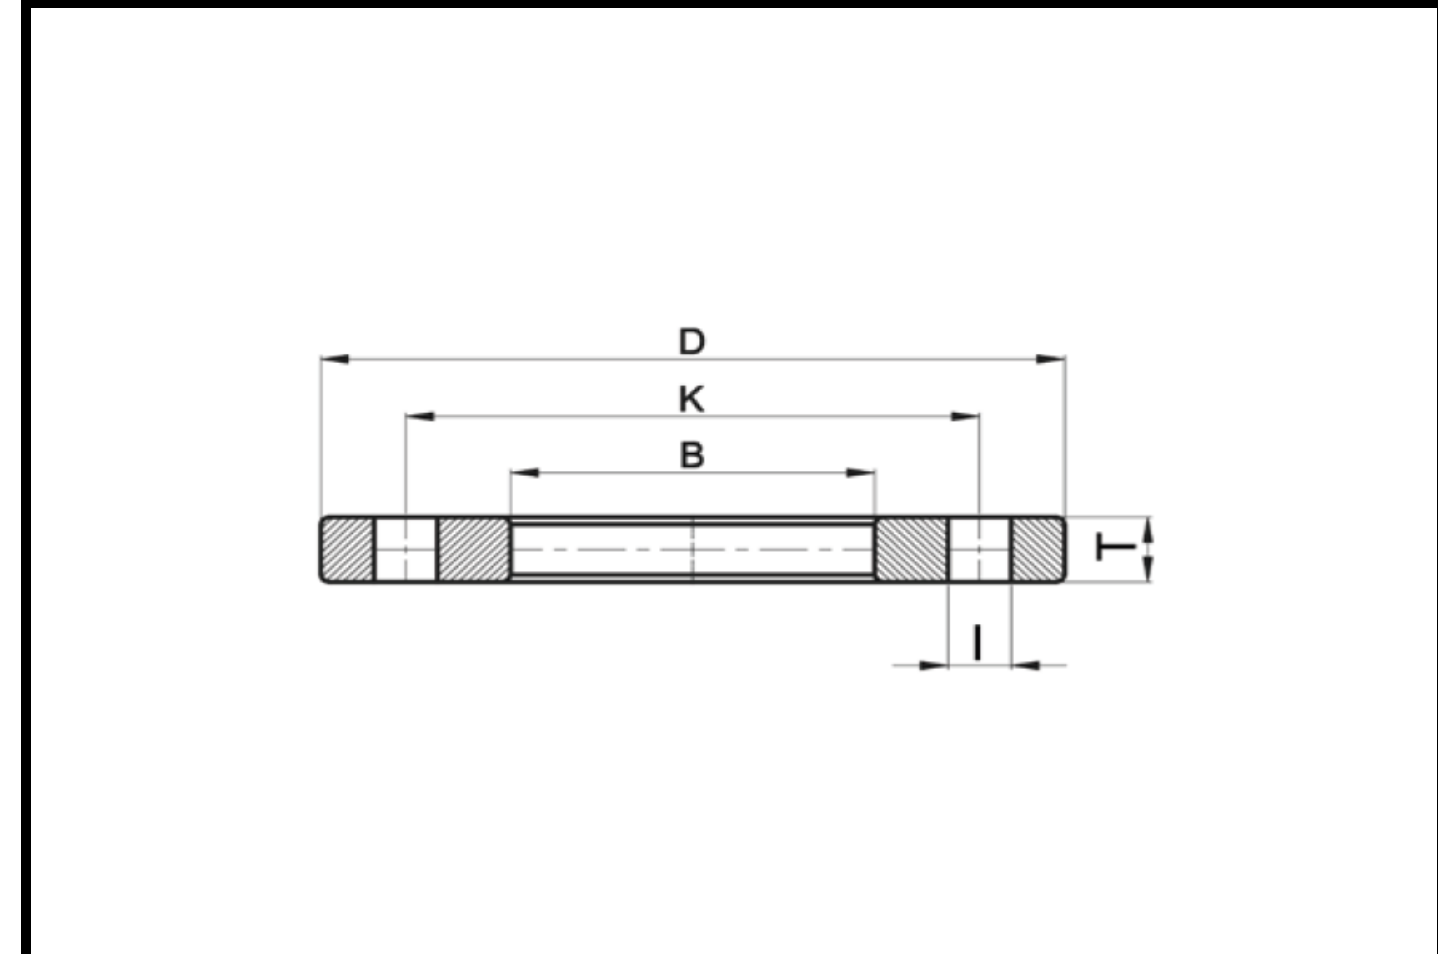

Serie

1258/55

AVK ref. nr.	NRF nr.	Rørdiameter mm	DN mm	D mm	B mm	K mm	T mm	Antall boltehull	I mm	Bolt Diameter
SBR020X015NP16		20	15	95	28	65	8	4	14	M12
SBR025X020NP16		25	20	105	34	75	8	4	14	M12
SBR032X025NP16		32	25	115	42	85	8	4	14	M12
SBR040X032NP16		40	32	140	51	100	8	4	18	M16
SBR050X040NP16		50	40	150	62	110	8	4	18	M16
SBR063X050NP16	2260095	63	50	165	78	125	8	4	18	M16
SBR075X065NP16	2260096	75	65	185	92	145	8	4	18	M16
SBR090X080NP16	2260097	90	80	200	108	160	8	8	18	M16
SBR110X100NP16	2260098	110	100	220	128	180	8	8	18	M16
SBR125X100NP16	2260099	125	100	220	135	180	8	8	18	M16
SBR140X125NP16	2260101	140	125	250	158	210	10	8	18	M16
SBR160X150NP16	2260102	160	150	285	178	240	10	8	22	M20
SBR180X150NP16	2260103	180	150	285	188	240	10	8	22	M20
SBR200X200NP16	2260104	200	200	340	235	295	10	12	22	M20
SBR225X200NP16	2260105	225	200	340	238	295	10	12	22	M20
SBR250X250NP16	2260106	250	250	405	288	355	15	12	26	M24
SBR280X250NP16	2260107	280	250	405	294	355	15	12	26	M24
SBR315X300NP16	2260108	315	300	460	338	410	20	12	26	M24
SBR355X350NP16	2260109	355	350	520	376	470	20	16	26	M24
SBR400X400NP16	2260111	400	400	580	430	525	25	16	30	M27
SBR450X450NP16	2260112	450	450	640	465	585	25	20	30	M27
SBR450X500NP16	2260113	450	500	715	517	650	25	20	33	M30
SBR500X500NP16	2260114	500	500	715	533	650	25	20	33	M30
SBR560X600NP16	2260115	560	600	840	618	770	25	20	36	M33
SBR630X600NP16	2260116	630	600	840	645	770	25	20	36	M33

Raw Material:	316 Syrefast stål
Spigot Length:	N/A
Trademark:	N/A
Process Type:	Stansing
Application:	Vann og Gass
Standards:	Produsert iht. EN1092-1