


# DATABLAD




Løslens, galvanisert - PN16 EN 1092-1

## PRODUKT BILDE

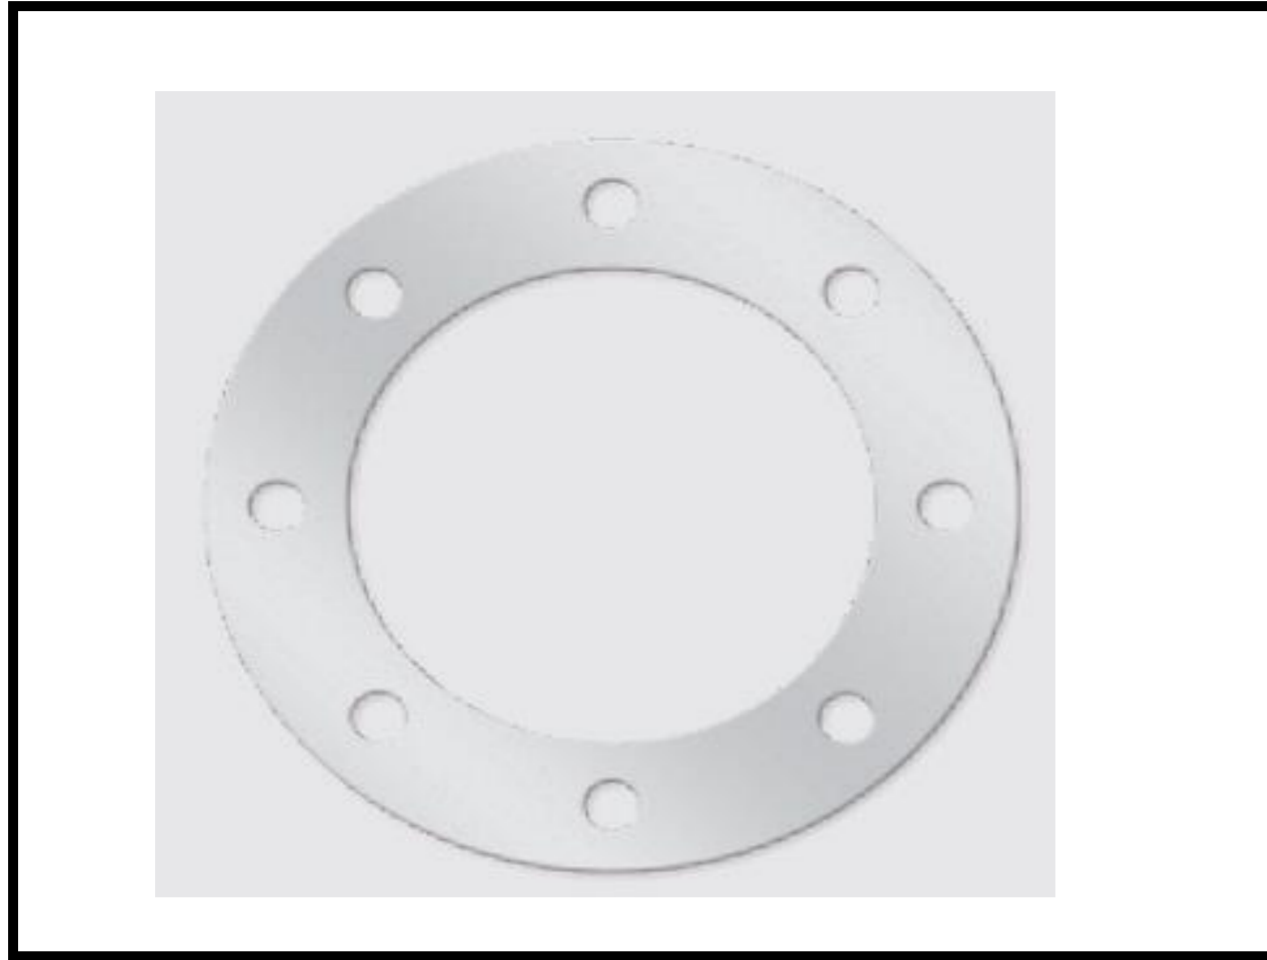

## TEGNING MED MÅL

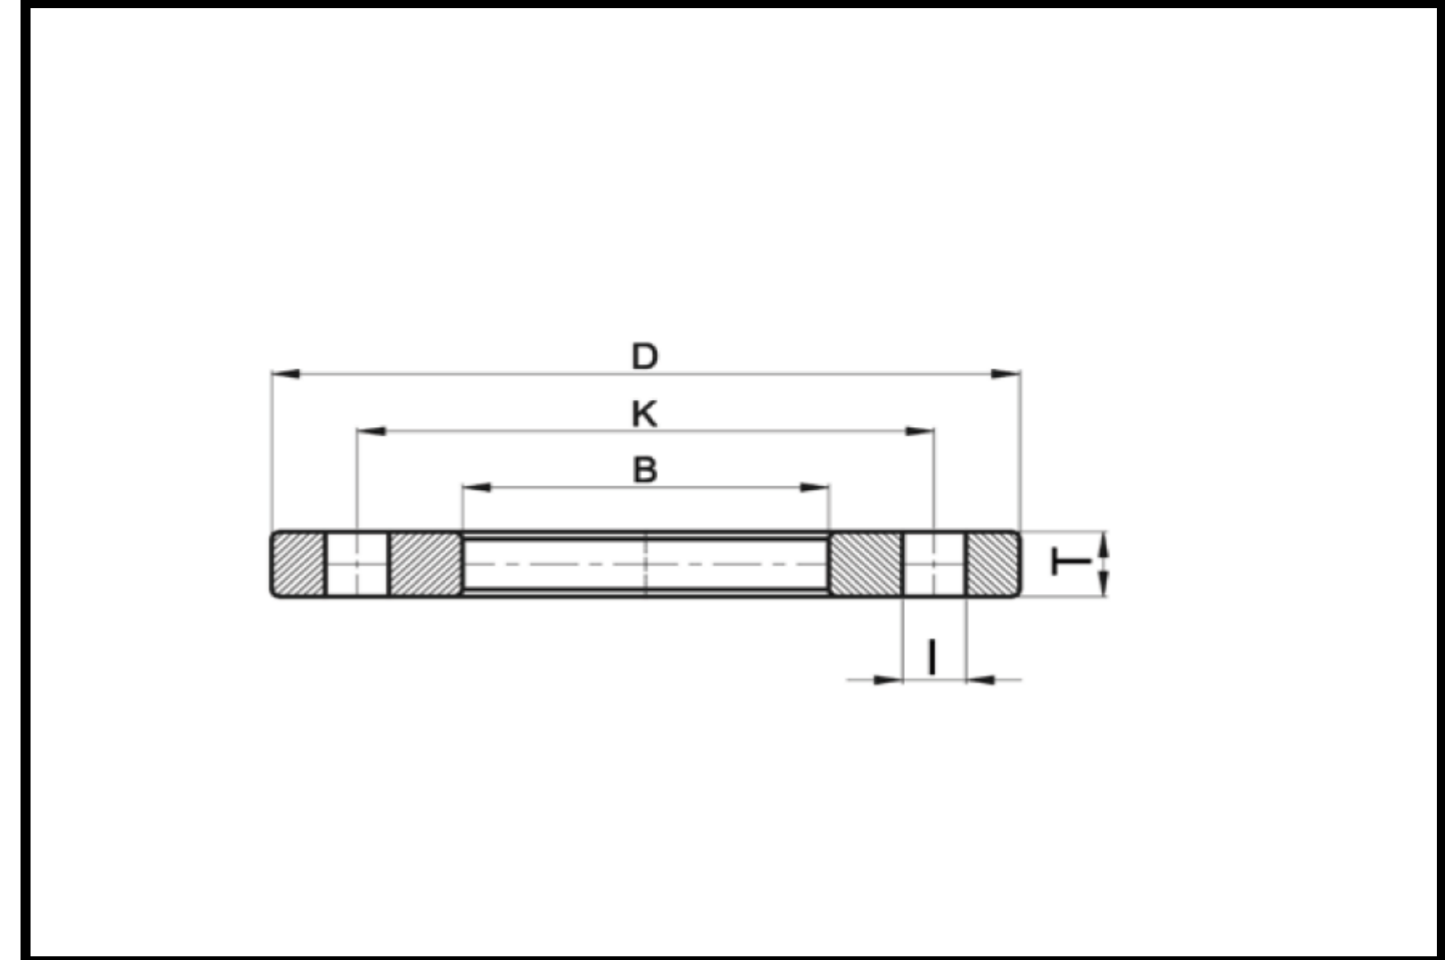

### Serie

1258/25

AVK ref. nr.	NRF nr.	Rør diameter mm	DN mm	D mm	B mm	K mm	T mm	Antall Boltehull	I mm	Bolt Diameter
GBR020X015NP16		20	15	95	28	65	8	4	14	M12
GBR025X020NP16		25	20	105	34	75	8	4	14	M12
GBR032X025NP16		32	25	115	42	85	8	4	14	M12
GBR040X032NP16		40	32	140	51	100	8	4	18	M16
GBR050X040NP16		50	40	150	62	110	8	4	18	M16
GBR063X050NP16	2260054	63	50	165	78	125	8	4	18	M16
GBR075X065NP16	2260055	75	65	185	92	145	8	4	18	M16
GBR090X080NP16	2260056	90	80	200	108	160	8	8	18	M16
GBR110X100NP16	2260057	110	100	220	128	180	8	8	18	M16
GBR125X100NP16	2260058	125	100	220	135	180	8	8	18	M16
GBR140X125NP16	2260059	140	125	250	158	210	10	8	18	M16
GBR160X150NP16	2260061	160	150	285	178	240	10	8	22	M20
GBR180X150NP16	2260062	180	150	285	188	240	10	8	22	M20
GBR200X200NP16	2260063	200	200	340	235	295	10	12	22	M20
GBR225X200NP16	2260064	225	200	340	238	295	10	12	22	M20
GBR250X250NP16	2260065	250	250	405	288	355	15	12	26	M24
GBR280X250NP16	2260066	280	250	405	294	355	15	12	26	M24
GBR315X300NP16	2260067	315	300	460	338	410	20	12	26	M24
GBR355X350NP16	2260068	355	350	520	376	470	20	16	26	M24
GBR400X400NP16	2260069	400	400	580	430	525	25	16	30	M27
GBR450X450NP16	2260071	450	450	640	465	585	25	20	30	M27
GBR450X500NP16	2260072	450	500	715	517	650	25	20	33	M30
GBR500X500NP16	2260073	500	500	715	533	650	25	20	33	M30
GBR560X600NP16	2260074	560	600	840	618	770	25	20	36	M33
GBR630X600NP16	2260081	630	600	840	645	770	25	20	36	M33

Materiale:	Galvanisert stål
Type:	N/A
Varemerke:	N/A
Prosess:	Stansing
Applikasjon:	Vann og Gass
Standard:	Produsert iht. EN1092-1

FUSION PLASTICS LTD reserve the right to revise this product specification document, while maintaining compliance with the requirements of the product without prior notice. Tolerance on diameters and thickness according to the relevant standards unless otherwise specified. Tolerance: ±5%